




ESSENTIAL KNOWLEDGE WHEN ANCHORING

ADEQUATE SCOPE IS A MUST!
THIS IS CRUCIAL ADVICE WHEN ANCHORING REGARDLESS OF WHAT TYPE OF ANCHOR YOU MAY BE USING.


Scope is the length of anchor line relative to the distance from your boat's deck to the sea bottom.

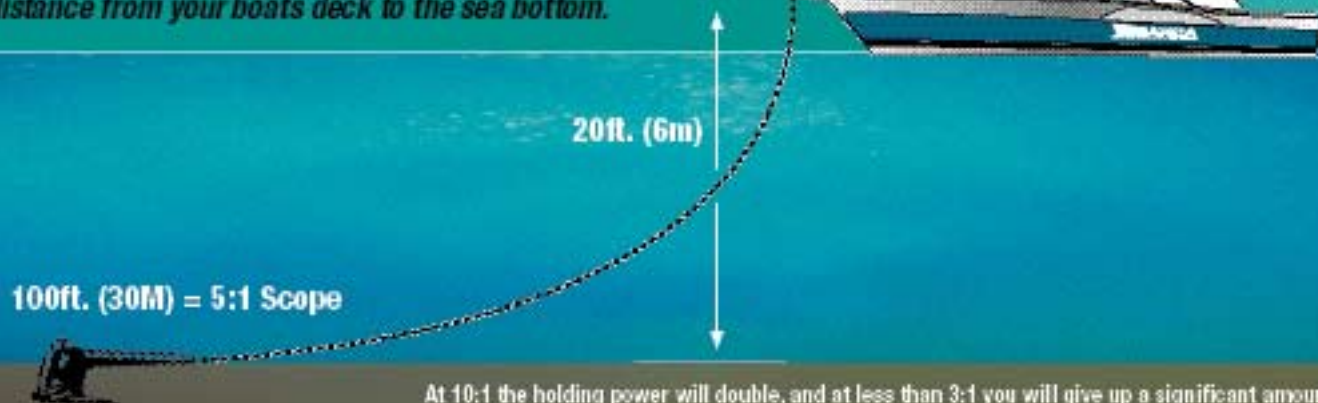

At 10:1 the holding power will double, and at less than 3:1 you will give up a significant amount of holding power and may experience problems setting the anchor.

SCOPE HOLDING POWER

In crowded anchorages "Power Set" your anchor at 5:1 scope, then shorten scope as required, remember that your depth sounder may be giving you the water depth under your keel, rather than from the true waterline, in which case you need to add your draft plus the height of your deck when calculating scope.

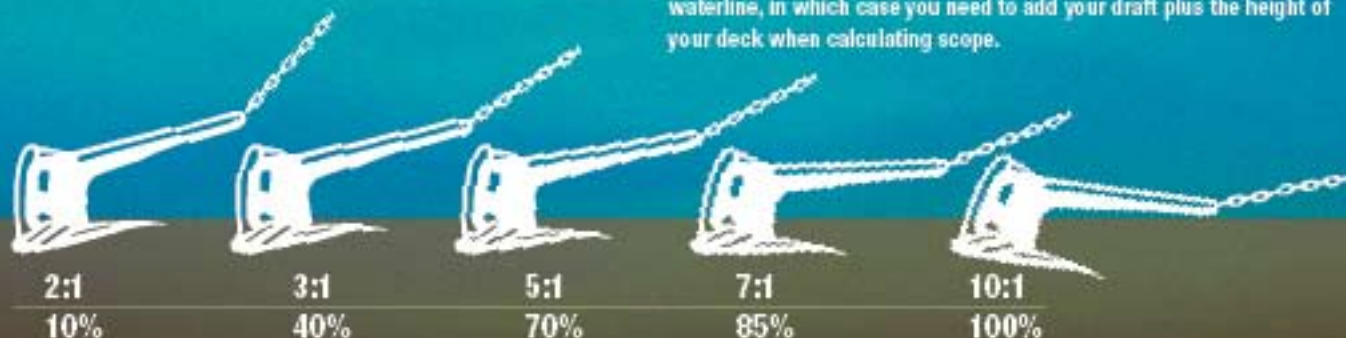

NOTE: THE SARCA ANCHOR

We recommend a minimum of 3:1 rope scope in calm conditions.

Our minimum length and chain size is clearly mentioned in our guide to help you select the correct size SARCA for your boat

The D-Shackle

Must be of stainless steel and of standard D shape.

If the correct D-shackle is not used, the anchor's performance along with the trip release will certainly be reduced.

NOTE:

The D-shackle must be fitted with the bolt through the trip release slot.

The correct shackle size is shown on the price list.





STAINLESS STEEL ANCHORS

Anchor Size	Boat Length in metres	Boat Weight Tons	* Weight of the Anchor	Width mm	Height mm	Length mm	Stainless Shackle	Guide to the MINIMUM length of leader chain	SUG Retail Pricing Incl VAT
No 1	3.8 - 4.5	1/2 T	4.0Kg	310	200	460	6mm	4 m of 8mm	
No 2	4.0 - 6.5	1.5 T	6.0Kg	360	260	565	8mm	5 m of 8mm	
No 3	6.5 - 8.5	1.5 - 2T	9.0Kg	380	290	620	10mm	6 m of 8mm	
No 4	7.0 - 10.5	2 - 3.5T	13.0Kg	440	320	680	10mm	7 m of 8mm	
No 5	9.5 - 12.5	3.5 - 5T	14.8Kg	460	330	690	10mm	9 m of 10mm	
No 6	11.5 - 15.0	5 - 11T	22.0Kg	555	370	760	12mm	11 m of 10mm	
No 7	13.5 - 17.0	11 - 17T	25.0Kg	560	380	780	12mm	13 m of 12mm	
No 8	15.0 - 20.0	17 - 26T	34.5Kg	585	390	830	12mm	15 m of 12mm	
No 9	20.0 - 28.0	26 - 38T	41.5Kg	600	420	870	16mm	20 m of 12mm	
No 11	25.0 - 30.0	38 - 56T	60.5Kg	700	490	950	18mm	25 m of 14mm	
No 13	30.0 - 35.0	50 - 126T	74.0Kg	700	490	950	20mm	30 m of 14mm	
No 15	30 - 40	126 - 200T	145.0Kg	780	600	1100			



STAINLESS STEEL BOWSPRITS

BOWSPRITS	Anchor Suitability	Length (mm)	Mounting Length (mm)	Width (mm)	Height (mm)	SUG Retail Pricing Incl VAT
A1-2	1, 2	336	217	69	57	
W3-4	3, 4	378	208	78	60	
W5-A	5, 6, 7, 8	423	299	108	70	
W5-B (Long Mounting Base)	5, 6, 7, 8	728	604	108	70	
W6-A	8, 9, 11, 13	470	347	100	80	
W6-B (Long Mounting Base)	8, 9, 11, 13	724	601	100	80	



GALVANISED ANCHORS

Anchor Size	Boat Length in metres	Boat Weight Tons	* Weight of the Anchor	Width mm	Height mm	Length mm	Stainless Shackle	Guide to the MINIMUM length of leader chain	SUG Retail Pricing Incl VAT
No .5	Up to 3.8		2.0Kg	270	200	420	6mm	3 m of 8mm	
No 1	3.8 - 4.5	1/2 T	4.0Kg	310	200	460	6mm	4 m of 8mm	
No 2	4.0 - 6.5	1.5 T	6.0Kg	360	260	565	8mm	5 m of 8mm	
No 3	6.5 - 8.5	1.5 - 2T	9.0Kg	380	290	620	10mm	6 m of 8mm	
No 4	7.0 - 10.5	2 - 3.5T	13.0Kg	440	320	680	10mm	7 m of 8mm	
No 5	9.5 - 12.5	3.5 - 5T	14.8Kg	460	330	690	10mm	9 m of 10mm	
No 6	11.5 - 15.0	5 - 11T	22.0Kg	555	370	760	12mm	11 m of 10mm	
No 7	13.5 - 17.0	11 - 17T	25.0Kg	560	380	780	12mm	13 m of 12mm	
No 8	15.0 - 20.0	17 - 26T	34.5Kg	585	390	830	12mm	15 m of 12mm	
No 9	20.0 - 28.0	26 - 38T	41.5Kg	600	420	870	16mm	20 m of 12mm	
No 11	25.0 - 30.0	38 - 56T	60.5Kg	700	490	950	18mm	25 m of 14mm	
No 13	30.0 - 35.0	50 - 126T	74.0Kg	700	490	950	20mm	30 m of 14mm	
No 15	30 - 40	126 - 200T	145.0Kg	780	600	1100			

*Please note anchor weights may vary.