Sarca Bow Sprits or fair leads are unique to Anchorright's products, they come in a variety of sizes and suit all anchor designs, our bow sprits not only properly secure or house your anchor but allow for free falling when launching and correct alignment upon retrieving.

## HEAVY DUTY BOWSPRITS

Self launching

Manufactured from 316 stainless

Designed for max strength and durability

Self rights the anchor on retrieval

Rollers easy removed and replaced

Heavy duty threaded thumb screw for anchor removal (note: this only applies to Bowsprit range up to W3-4)

Duel roller prevents bruising & chaffing of the anchor rope

Its design suits or can be adapted to most boats

Wide ranges of sizes available

3 years warranty (excluding rollers)

Sarca Bowsprits come in wide variety of sizes suitable for small tinnies up to super yachts.

A1-2 Bowsprit

W3-4 A Bowsprit (winch application)

W3-4 B Bowsprit (long mounting base)

W3-4 C Bowsprit (extra long mounting base)

W5-A Bowsprit

W5-B Bowsprit (long mounting base)

W6-A Bowsprit

W6-B Bowsprit (long mounting base)




The SARCA BOWSPRIT in Position.

## **ALUMINIUM BOWSPRITS:**

The aluminium range are extremely durable and offer the same benefits as the 316 S/S unit, on glass boats they are easily bolted for sturdy application, with aluminium hulls you can bolt or weld straight to the front of most boat designs to properly house or secure your anchor.



## SELF LAUNCHING BOWSPRIT SIZING SPECIFICATIONS

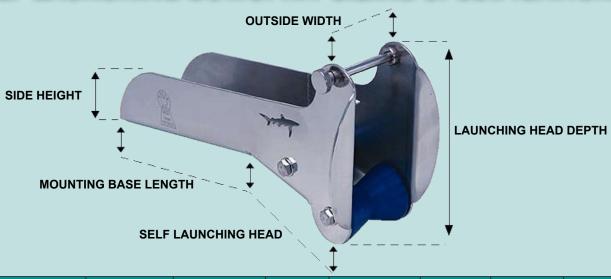

BOWSPRIT	MOUNTING BASE LENGTH	SELF LAUNCHING HEAD	SIDE HEIGHT	LAUNCHING HEAD DEPTH	OUTSIDE WIDTH	ANCHOR WEIGHT	SARCA ANCHOR SIZES
A1-2 STAINLESS (2.5MM 316)	210 mm	100 mm	58 mm	160 mm	70 mm	Up to 10 Kg	0.5 to NO: 2
A1-2 ALUMINIUM (4MM)	210 mm	100 mm	58 mm	160 mm	75 mm	Up to 10 Kg	0.5 to NO: 2
W3-4 A STAINLESS (3MM 316) WINCH APPLICATION	255 mm	110 mm	60 mm	165 mm	75 mm	Up to 17 Kg	3 to NO: 4
W3-4 ALUMINIUM (4MM)	225 mm	110 mm	60 mm	165 mm	80 mm	Up to 15 Kg	3 to NO: 4
W3-4B STAINLESS (4MM 316)	400 mm	110 mm	60 mm	165 mm	75 mm	Up to 17 Kg	3 to NO: 4
W3-4C STAINLESS (4MM 316)	590 mm	110 mm	60 mm	165 mm	75 mm	Up to 17 Kg	3 to NO: 4
W5-A STAINLESS (4MM 316)	285 mm	110 mm	70 mm	200 mm	108 mm	Up to 40 Kg	5 to NO: 8
W5-B STAINLESS (4MM 316)	590 mm	110 mm	70 mm	200 mm	108 mm	Up to 40 Kg	5 to NO: 8
W6-A STAINLESS (5MM 316)	335 mm	110 mm	85 mm	245 mm	150 mm	Up to 75 Kg	9 to NO: 13
W6-B STAINLESS (5MM 316)	590 mm	110 mm	85 mm	245 mm	150 mm	Up to 75 Kg	9 to NO: 13

SARCA BOWSPRITS ACCOMMODATE MOST ANCHOR DESIGNS.









Anchor Right Pty Ltd 27 Dunstan Road, Avonsleigh, Victoria, Australia 3782 Tel / Fax: +61 3 5968 5014

